


Nikko Carrier Tape Tray

Perfect for high mix & low volume production and trial & pre-production.


- For reusing SMD
- For SMD evaluation
- For short carrier tapes
- For separated SMD



Quick & easy mounting with SMT machine

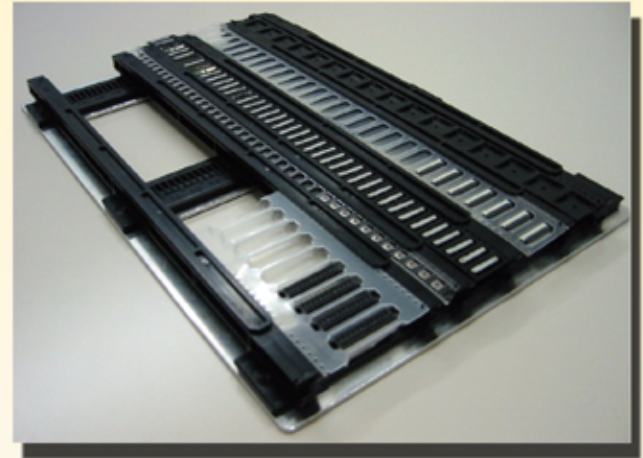

How to use?

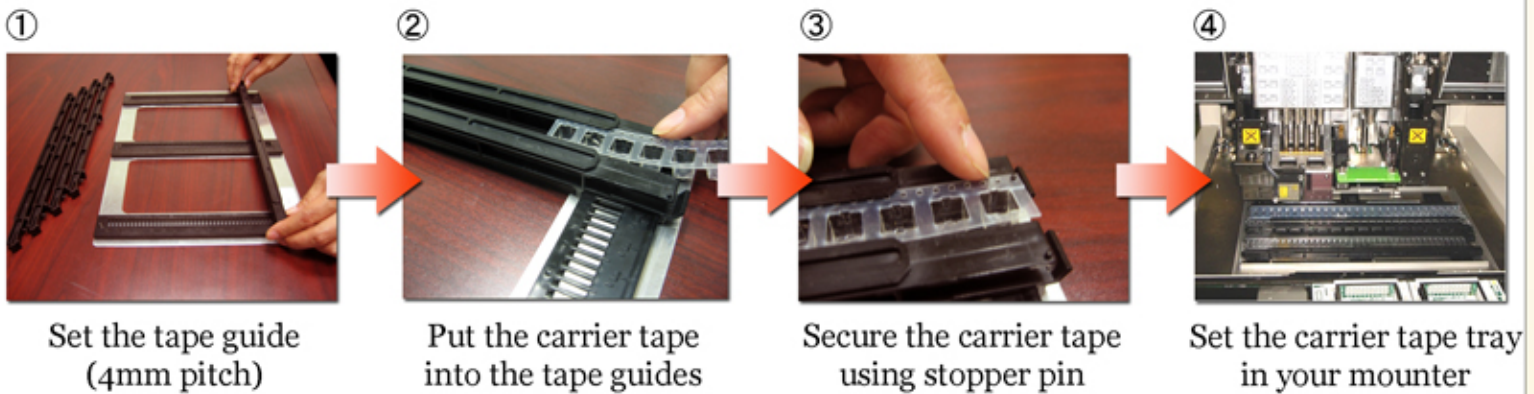

Specifications

Model No.	NCAJ-S
Outer Dimensions	230(W) X 355(L) X 20(H) mm
The amount of the tape guides	5 (able to set 4 different width tapes)
Height of component	Maximum 10mm
Optional	Extra tape guide

The width of Carrier Tape Tray	Maximum number of Carrier Tape strips
8 mm (0.35inch)	12*
12mm (0.47inch)	10*
16mm (0.63inch)	8*
24mm (0.94inch)	6*
32mm (1.26inch)	5*
44mm (1.73inch)	3
56mm (2.21inch)	3
74mm (2.91inch)	2

*Note

If you would like to put more than 4 carrier tapes on one Nikko Carrier Tape Tray, you will need to add extra tape guides.



Rubroeder GmbH Factory Automation, Theodor-Neizert-Straße 1, 56170 Bendorf, Germany
 Tel.: 0 26 01 / 94 37 30, Fax: 0 26 01 / 94 37 50, E-Mail: info@rubroeder.de, Internet: www.rubroeder.de